


INSTALLATION INSTRUCTIONS
SINGLE BAR / KITCHEN
DECK FAUCET
Model No: 2007, 2008

NEWPORT BRASS
Proven Beauty. Proven Function. Proven Quality.

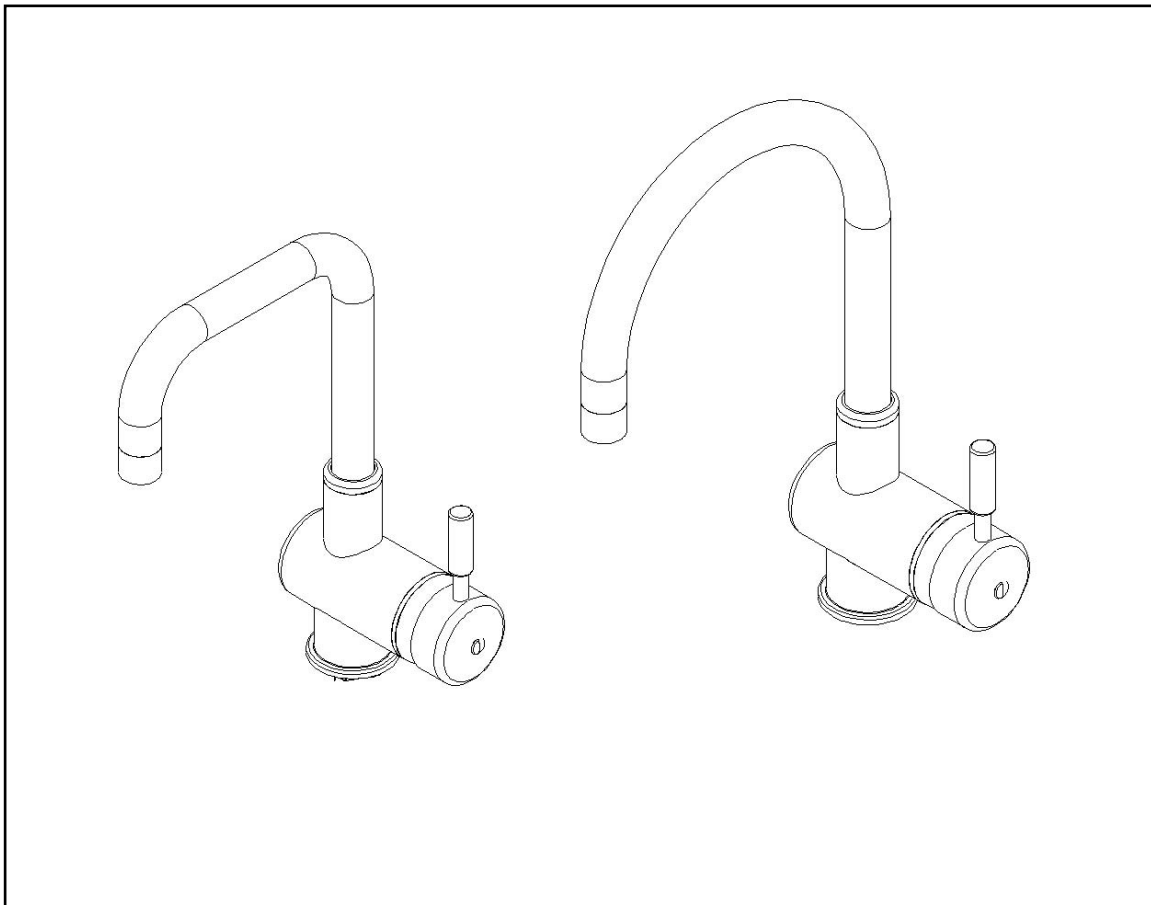

**Congratulations on the purchase
of this Newport Brass product,
an excellent choice, that will give you
years of quality service and enhance
the look and style of your home.**

Recommended Installation by a Professional Plumbing Contractor

Note: The use of petroleum base plumbers putty on our products will nullify the warranty. We recommend the use of clear silicone sealing materials.
Recommended deck thru hole Ø 1.25" to Ø1.38

I. INSTALLING FAUCET ON SINK (See Fig I)

- Slide the BASE (2) over STUD (1).
- Place O-RING (3) between BASE (2) and deck surface.
- Align STUD (1) to the left of sink. Place GASKET (4), CRESCENT (5), and NUT (6) onto STUD (1).
- Firmly tighten NUT (6) with wrench.

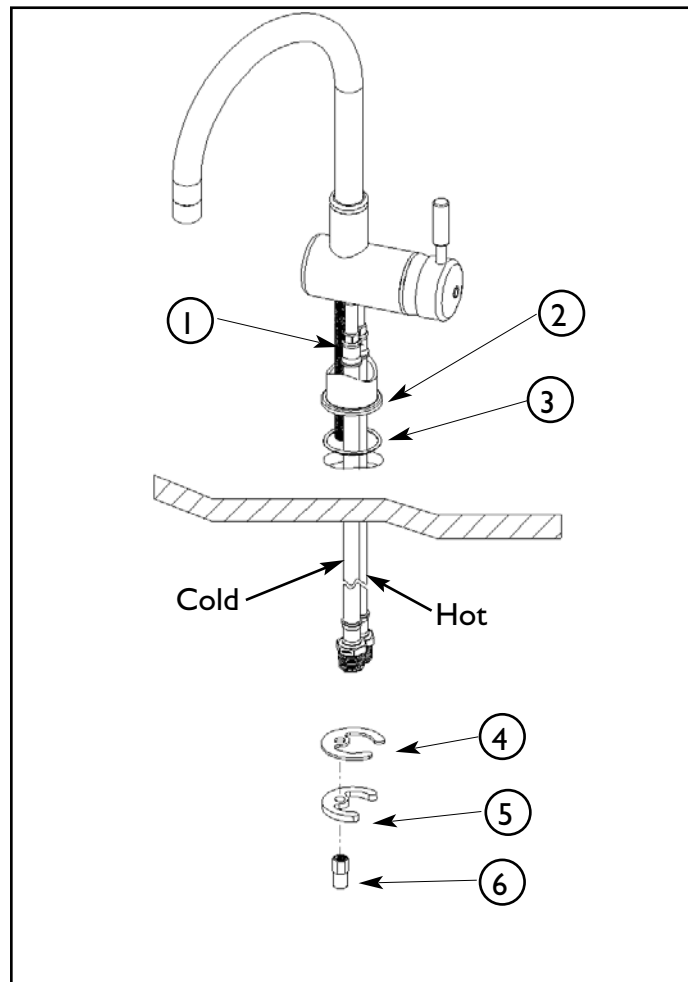


Figure I

2. ATTACHING WATER CONNECTIONS TO SUPPLY (See Fig 2)

Attach faucet 1/2 MIP HOSES (6) to risers and water supply valves not included. **See Figure 2.**

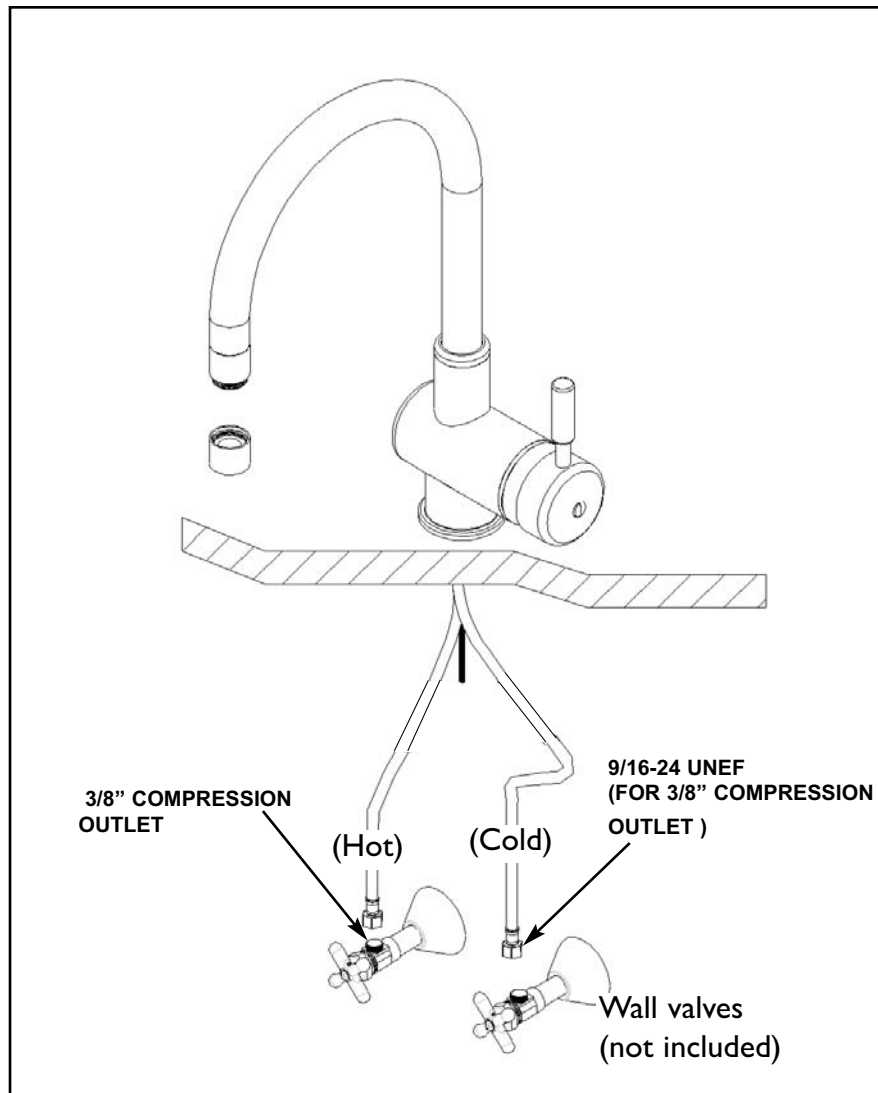


Figure 2

3. TEST INSTALLED FAUCET

- With handle in OFF position, turn on water supplies and check all connections for leaks.
- Remove spout aerator and operate handle in both hot and cold positions to flush water lines thoroughly. Reattach aerator to spout after flushing lines.