


## REPLACEMENT PARTS

### NOTE:

1. USE SILICON GREASE (PART NUMBER 6727) TO LUBRICATE O-RINGS BEFORE INSTALL.

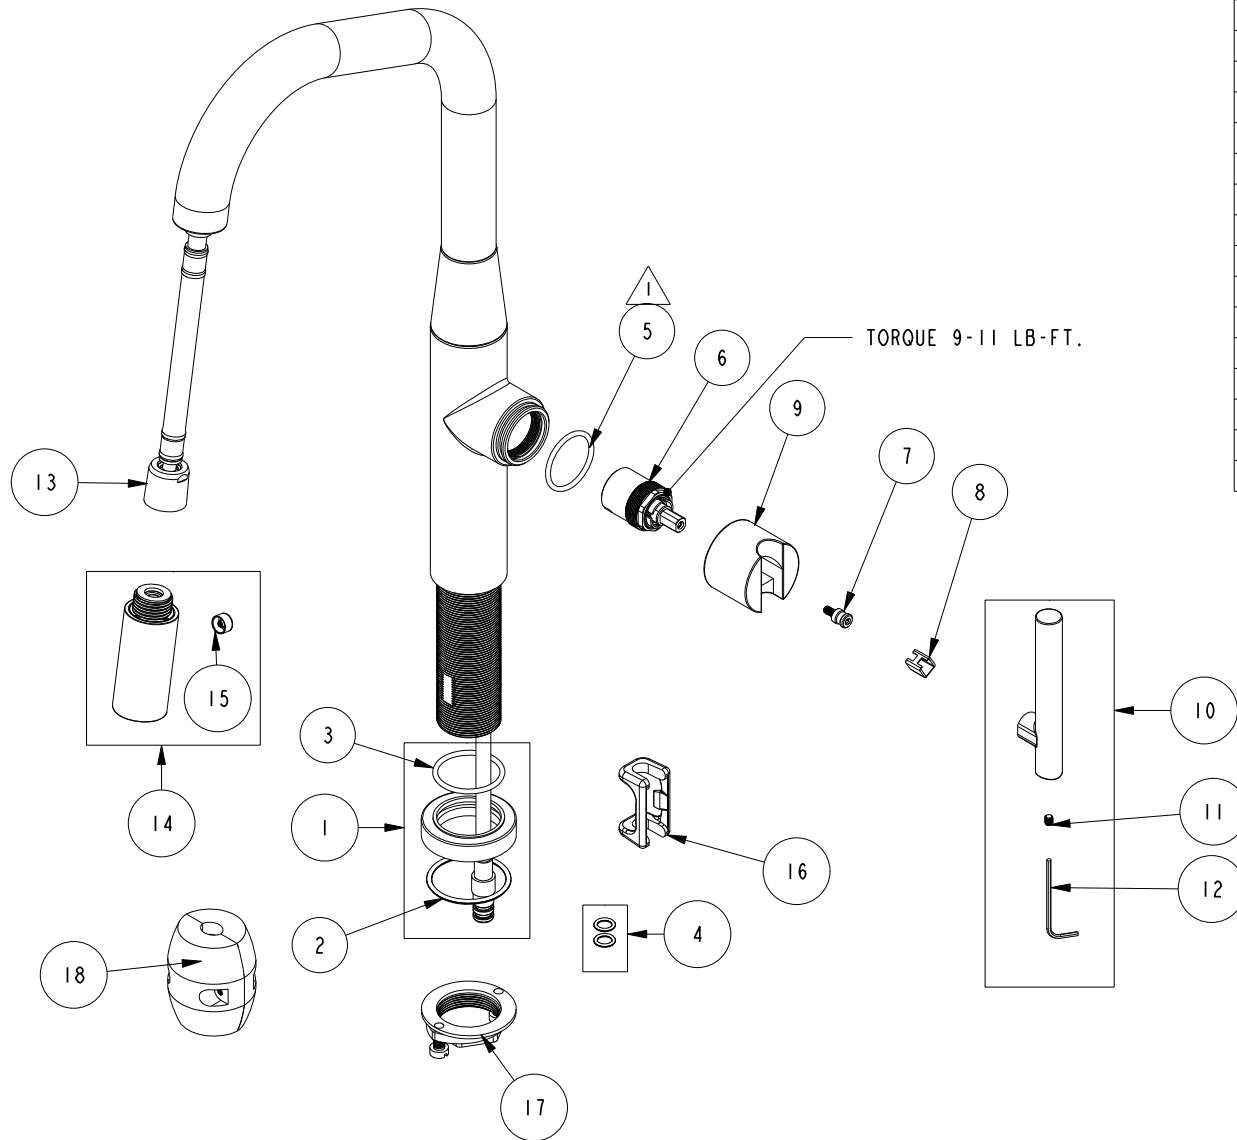

| ITEM | PT/ASSY | SPECIFY FINISH | DESCRIPTION                         |
|------|---------|----------------|-------------------------------------|
| 1    | 20-390  | YES            | ESCUTCHEON ASM                      |
| 2    | 91763   |                | O-RING, #2- 129, EP, 50 DURO - GREY |
| 3    | 91227   |                | O-RING, #2-125 EPDM                 |
| 4    | 1-399   |                | O-RING KIT FOR SPOUT PEX CONECTION  |
| 5    | 91505   |                | O-RING, #2-123, EPDM, 65-75 DURO    |
| 6    | 1-371   |                | CARTRIDGE                           |
| 7    | 11874   |                | HANDLE ADAPTER SCREW                |
| 8    | 91534   |                | CARTRIDGE STEM INSERT               |
| 9    | 13825   | YES            | HANDLE HUB, CONTEMP                 |
| 10   | 20-389  | YES            | HANDLE ASM                          |
| 11   | 92001   |                | SCRW, 8-32 X 3/16 SKT HD FLT PT SS  |
| 12   | 10192   |                | HEX KEY TOOL, #8 5/64               |
| 13   | 11877A  |                | HOSE, PULLDOWN, GREY                |
| 14   | 3-480   | YES            | SPRAY HEAD, EAST LINEAR             |
| 15   | 13975   | YES            | BUTTON                              |
| 16   | 91568   |                | RETAINER CLIP                       |
| 17   | 1-256   |                | MOUNTING KIT                        |
| 18   | 1-286   |                | WEIGHT ASM                          |

Pull-Down Kitchen Faucet  
1400-5143

REV A EN-5010 05/29/25

NEWPORT BRASS.

t: 949.417.5207 | www.newportbrass.com